

CAUTION
RISK OF INJURY!

Understand these instructions prior to using product.

VERTICAL LOAD BEARING ONLY - Product intended for moderate VERTICAL weight bearing on rail only. DO NOT use if sideward (lateral) support is needed.

AVOID RAIL LATCH UNLOCKING - Ensure that rail is at least 2"/50mm off floor when rail is in locked position. (Soft type box spring beds can compress downward under load allowing support frame to move down, and rail to become unlatched).

Maximum user weight 250lbs/113kg.

Do not use on wet or slippery floors.


Do not use with electric or hospital style beds.

Supplied strap must be installed for secure operation.

Product intended for moderate assistance with sitting up and standing only.


1 **Insert Support Frame**

Support Frame (Locate pivot tube adjacent to hip as shown below)

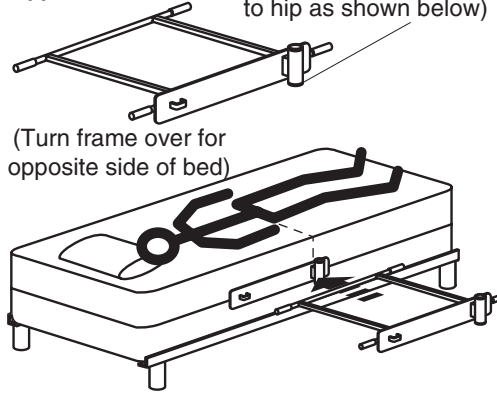


(Turn frame over for opposite side of bed)

2 **Insert Rail**

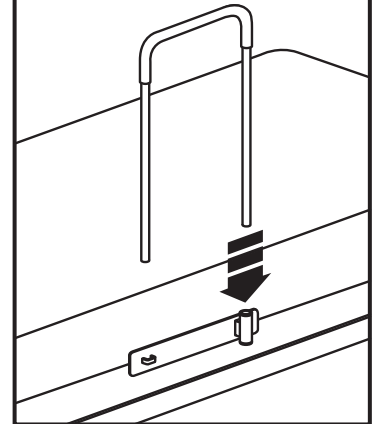

3 **Install SafeLatch™ Collar & Set Rail Height**


SafeLatch™ Collar

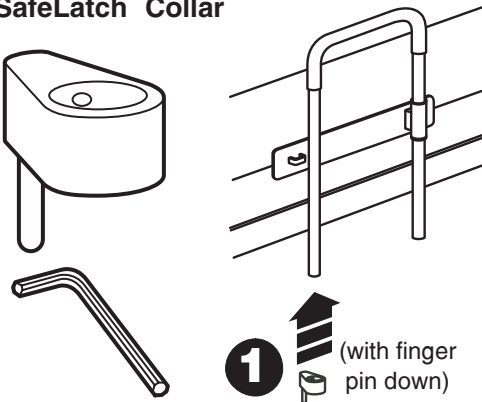


1 (with finger pin down)

3 (adjust rail height to best suit your needs within limits shown below)

(with rail at correct height, turn set screw until collar is tight on rail)

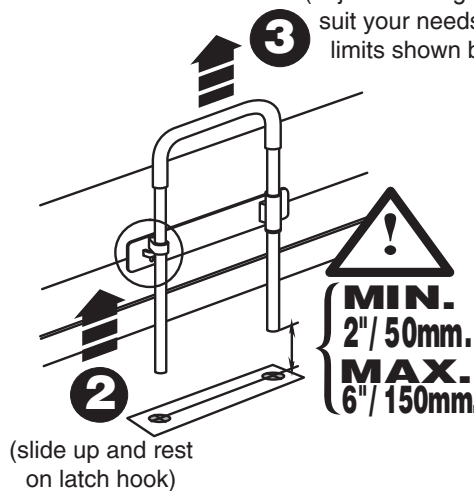


2 (slide up and rest on latch hook)

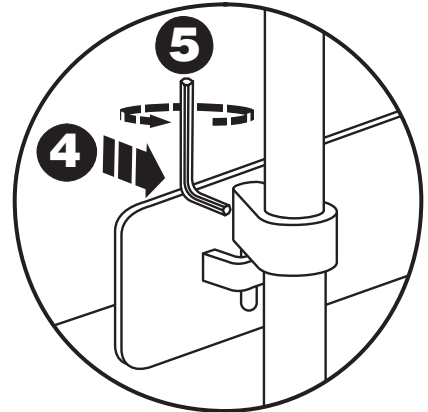

4 **Install Safety Strap**


Install strap over round tube (1), under and across both square tubes (2), and back over round tube (3) as shown below.

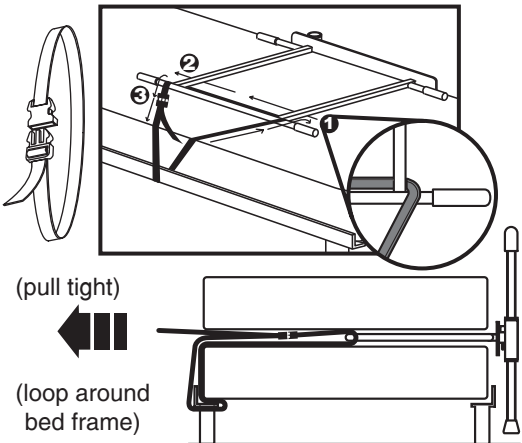

(pull tight)

(loop around bed frame)

5 **Install Cane Tips**

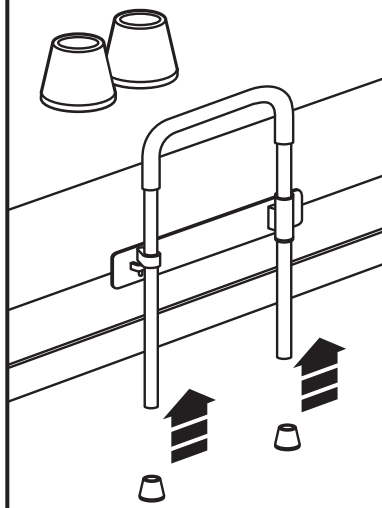


SUGGESTIONS...



LOCKED RAIL - grab onto grip, or leg of rail to help with moving in bed & sitting up at side of bed.



HINT - grab the rail closest to the pivot leg for most easy lifting. Pivot rail and place in an appropriate location as shown.



STANDING - use rail to help with standing up from bed. NOTE - rail is meant to provide support for vertical weight bearing only.